CB SYSTEM
SHARED SERVICE (MANUAL)
SUBSCRIBERS EXTENSION PLAN 4

N4389
9 PANELS - 1
4·10·44

CB & AUTO

24·6·57 D
1·5·61 E

JACK No.64A WAS No.64. MADE 9 PANELS.
PANELS 8 AND 9 MADE YELLOW.
NOTE 17 ADDED. CORDS CHANGED.

W

NOTES

1. EXTENSION JACK POSITIONS AS REQUIRED MAY BE FITTED FOR USE WITH ONE OR MORE PLUG TERMINATED TABLE TELEPHONES. THE FULL FACILITIES OF PLAN 4 ARE GIVEN ON DIAGRAM N1427.
2. AT Y INSTALLATIONS ON MINOR CB10 SYSTEMS AND AT X INSTALLATIONS ON OTHER CB SYSTEMS REVERSE THE A & B LINES ON B5 AND B7.
3. WHEN CONVERTING A D.E.L. TO THIS EXTENSION PLAN AN EXISTING TELEPHONE No. 332. MAY BE USED INSTEAD OF A TELEPHONE No. 328.

USING ONE TELEPHONE No.328CB, PLUG No. 404 & JACKS No.65. (PANELS 2&3).

4. DISCONNECT STRAPS B4-B5 AND B7-B8 IN BELL-SET No 26. THE STRAP B1-B7 EXISTS IN THE PERMANENT WIRING OF THE BELL-SET. FIT CORD INST. No.4/92AB GREBE 72"
5. IF AN EXTENSION BELL IS REQUIRED CONNECT BELL No.64D IN PLACE OF STRAP B2-B3 IN BELL-SET No.26. USE CABLE, 2W AND CONNECT TO BELL TERMINALS Nos.1 & 4 WITH 2 & 3 STRAPPED.
6. CONNECT STRAP J3-J4A AT LAST JACK POSITION.

USING TWO OR MORE TELEPHONES No.328CB, PLUGS No.612 & JACKS No.64A (PANELS 4 & 5).

7. DISCONNECT STRAPS T10-T11 AND T11-T12 IN EACH TELEPHONE No. 328CB. FIT CORD INST. No. 6/28 B BROWN 72"
8. DISCONNECT STRAPS B2-B3 AND B7-B8 IN BELL-SET No.26.
9. IF AN EXTENSION BELL IS REQUIRED CONNECT BELL No. 64D BETWEEN B9 & E & TRANSFER EARTH WIRE FROM E TO B9 IN BELL SET No.26. USE CABLE 2W & CONNECT TO BELL TERMINALS Nos.1 & 4 WITH 2 & 3 STRAPPED.
10. CONNECT STRAP J1A-J6 AT EACH JACK POSITION AND J2-J1 AT LAST POSITION.

USING ONE OR MORE TELEPHONES No.1/232CB, PLUGS No.404 & JACKS No.65. (PANELS 6&7).

11. DISCONNECT STRAPS B2-B3 AND B7-B8 IN BELL-SET No.26.
12. IF AN EXTENSION BELL IS REQUIRED APPLY NOTE 9.
13. IN EARLY TELEPHONES No.1/232CB TERMINALS T6 & T8 WERE REVERSED. THE EARLY TERMINAL NUMBER IS SHOWN IN BRACKETS. RECOVER CORD INST. No.3/628... FIT CORD INST. No.4/92AB...
14. CONNECT STRAP J4-J4A AT FIRST JACK POSITION AND J2-J4 AT LAST JACK POSITION.
15. CONNECT BELL No.64D BETWEEN J4-J4A AT EACH JACK POSITION OTHER THAN THE FIRST, EXCEPT AT POSITIONS WHERE ANOTHER BELL PERMANENTLY IN CIRCUIT IS AUDIBLE. CONNECT STRAP J4-J4A WHERE THE BELL IS NOT FITTED.
16. CAPACITOR PAPER No. 7712 HAS SUPERSEDED CAPACITOR MC No.102½ FOR NEW WORK. WHEN TWO OR MORE TELEPHONES ARE REQUIRED IT IS FITTED IN THE BELL SET No.26 USING A CLIP No. 56 3/4 IN. FIX THE CLIP ON THE CHASSIS AT THE HOLE ON THE RIGHT OF AND IN LINE WITH THE BELL COIL TAGS.
17. CORDS IN WHICH ALL CONDUCTORS ARE NOT USED. CUT THE SPARES BACK AT BOTH ENDS.

N4389
9 PANELS-2

WIRING
USING ONE TELEPHONE No.328CB MINUS CORD, WITH PLUG No.404,
JACKS No.65 & BELL-SET No.26

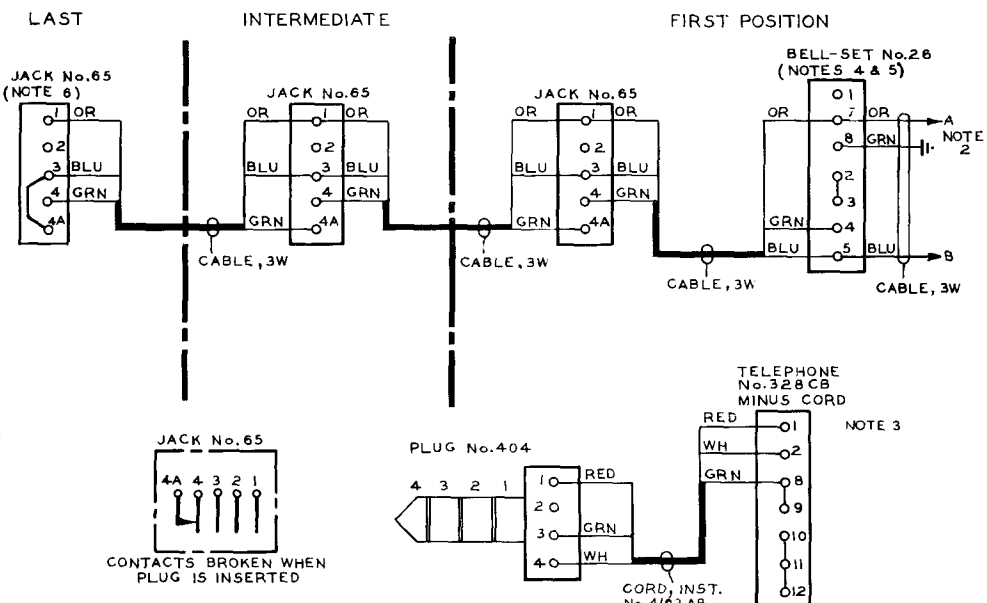

CB SYSTEM
SHARED SERVICE (MANUAL)
SUBSCRIBERS EXTENSION PLAN 4.

USING ONE TELEPHONE No.328CB MINUS CORD, WITH PLUG No.404, JACKS No.65 & BELL-SET No.26

EXPLANATORY

N4389
9 PANELS-3
4·10·44

CB & AUTO

D | E

24.6.57 I S 61

JACK No.64A WAS No.64. MADE 9 PANELS. JACK 64A & 9 PANELS. NOTE 17 ADDED. CORDS CHANGED.

W

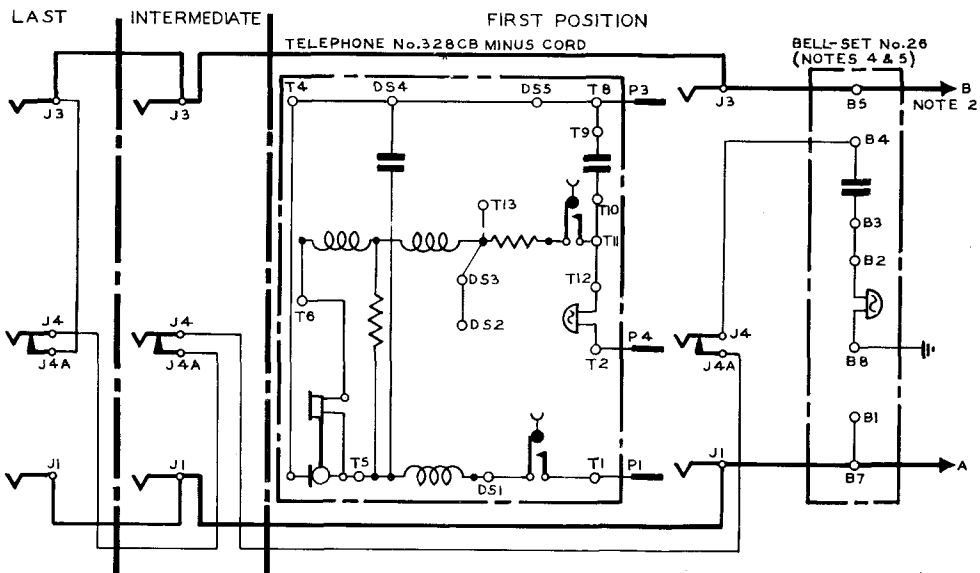

N4389
9 PANELS–4

WIRING

USING TWO OR MORE TELEPHONES No.328CB MINUS CORD, WITH PLUG No.612, JACKS No.64A & BELL-SET No.26

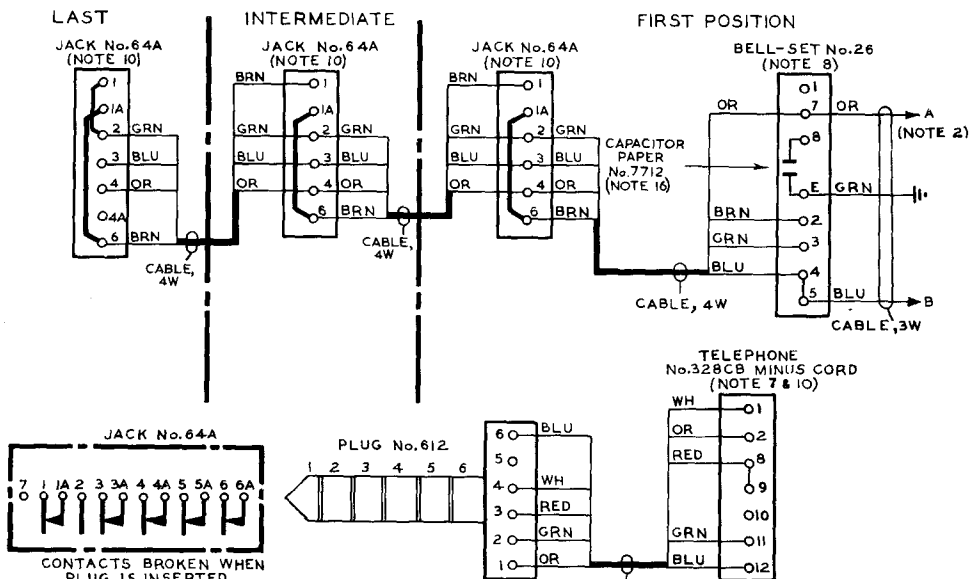

CB SYSTEM
SHARED SERVICE (MANUAL)
SUBSCRIBERS EXTENSION PLAN 4

N4389
9 PANELS-5
4-10-44

USING TWO OR MORE TELEPHONES No.328CB MINUS CORD, WITH PLUG No.612, JACKS No.64A & BELL-SET No.26

EXPLANATORY

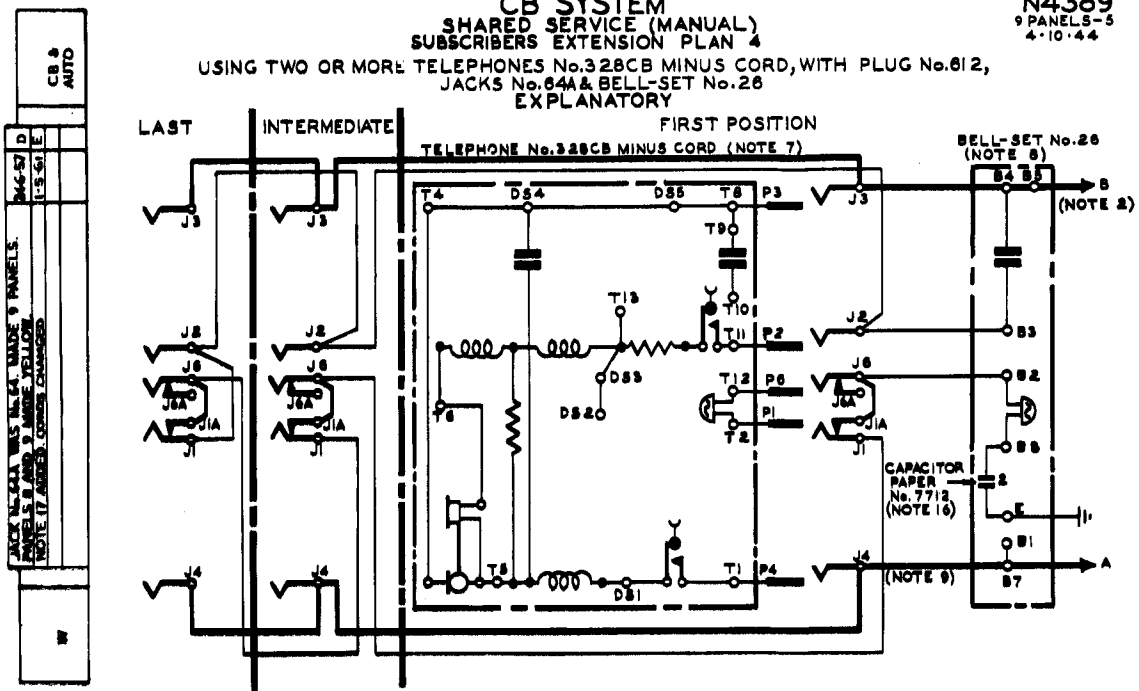

N4389
9 PANEL 5–6

WIRING

USING ONE OR MORE TELEPHONES No.1/232CB WITH PLUG No.404 & JACKS No.65

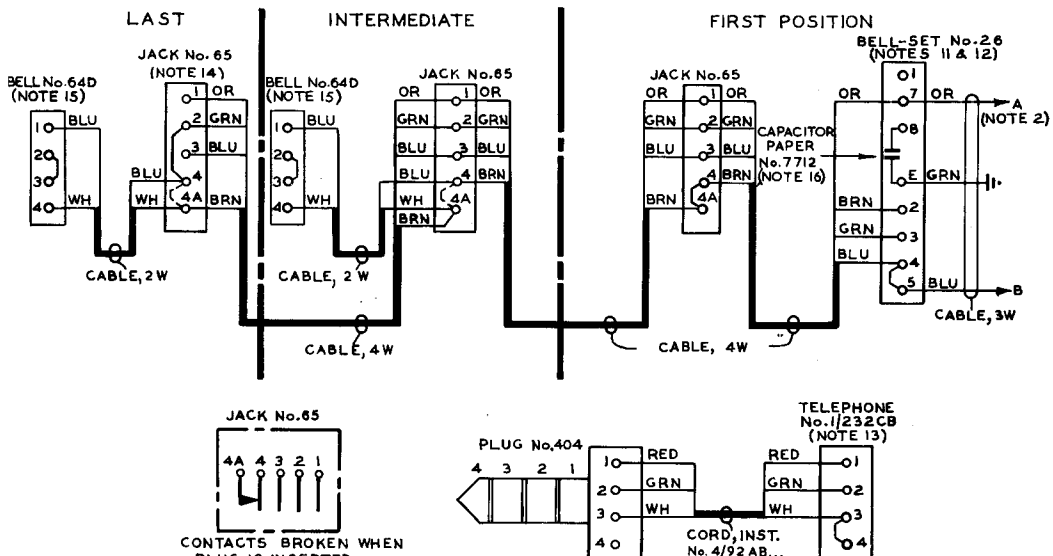

CB SYSTEM
SHARED, SERVICE (MANUAL)
SUBSCRIBERS EXTENSION PLAN 4.
USING ONE OR MORE TELEPHONES No.1/232CB WITH PLUG No.404, JACKS No.65 & BELL-SET No.26
EXPLANATORY

N4389
9 PANELS-7
4·10·44

CB & AUTO

D 24.6.57

E 1.5.61

JACK No.64A WAS No.64. MADE 9 PANELS. PANELS 8 AND 9 MADE YELLOW. NOTE 17 ADDED. CORDS CHANGED

W

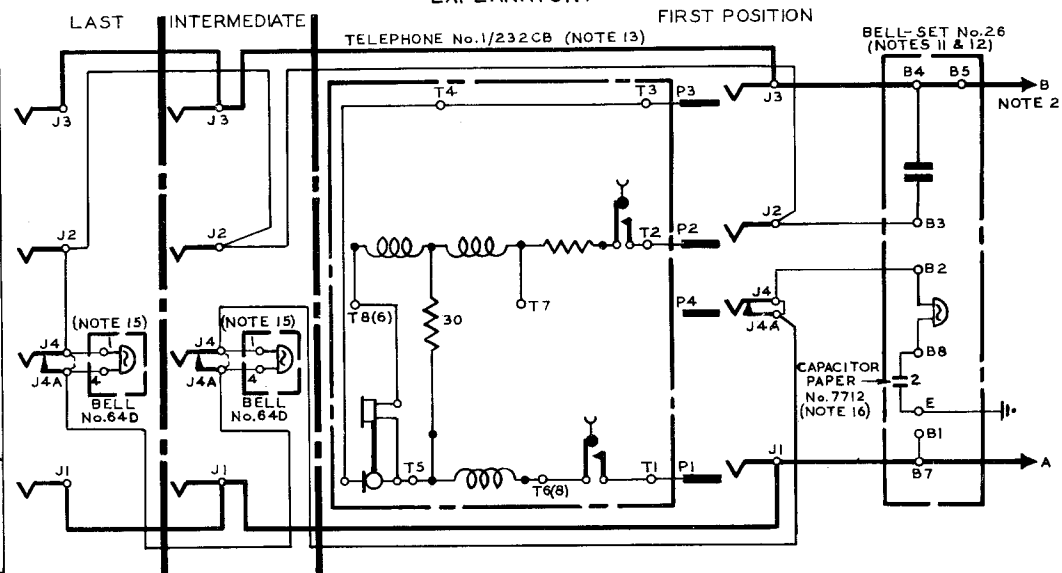

CB SYSTEM
SHARED SERVICE MANUAL
SUBSCRIBERS EXTENSION PLAN 4

N4389
9 PANELS-8
4-10-44

USING TWO OR MORE TELEPHONES No.328CB MINUS CORD, WITH PLUG No.612, JACK No.64 & BELL-SET No.26

EXPLANATORY

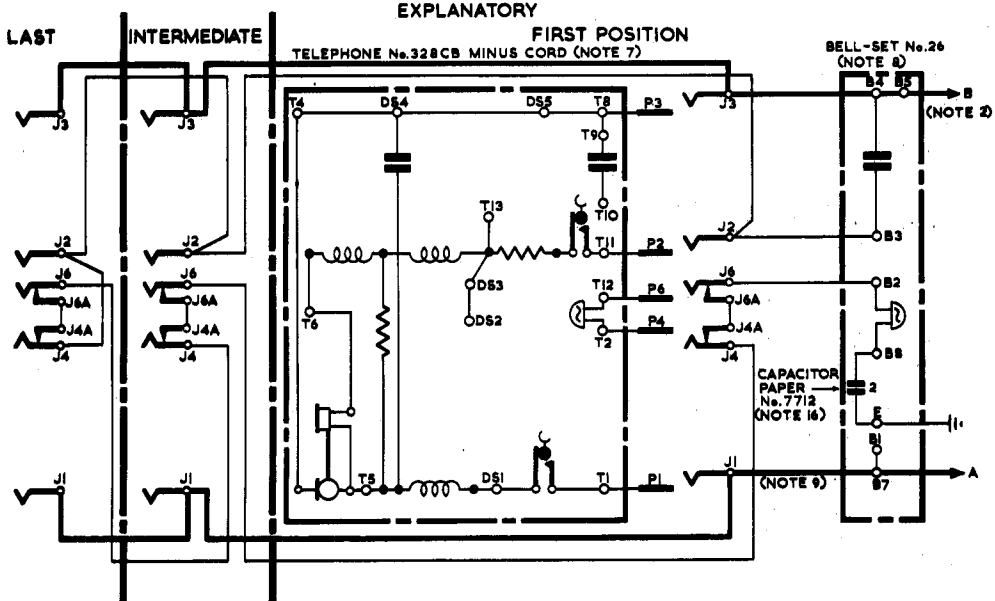

CB & AUTO

D
N4457
1-5-61
E.

JACK No.64A WAS No.64. MADE 9 PANELS.
PANELS 8 AND 9 MADE YELLOW.
NOTE 17 ADDED. CORDS CHANGED.

Y

N4389
9 PANELS-9

WIRING
USING TWO OR MORE TELEPHONES No.328CB MINUS CORD, WITH PLUG No.612, JACKS No.64 & BELL-SET No.26